



VISIONAIRE

L I G H T I N G

The **PRK** from Visionaire Lighting utilizes the latest in edge-lit technology, providing a well-lit environment without the intensity often associated with LED fixtures. Ideal for parking garages, the lumen package ranges from 3,000 to 15,000, in a variety of optical distributions that include T1 for drive lanes, or TSLS for maximum spacing between fixtures.

PRK



Key Features


- Die Cast aluminum heat sink
- Four specification-grade optics
- 3000K CCT, 4000K CCT and 5000K CCT
- 3,000 – 15,000+ Lumen package
- 25 – 115 Wattage Range
- 120- 277 UNV Voltage Drivers
- Up-Light (800 Lumens)
- Wild Life Guard
- Title 24 Compliant Motion Sensor
- 0-10V Dimming Driver
- Cold Weather Emergency Battery Pack (Rated for -20°)
- Visionaire Wireless Controls
- Integrated UL924 Device

Mounting Options


Pendant Mount



Trunnion Mount

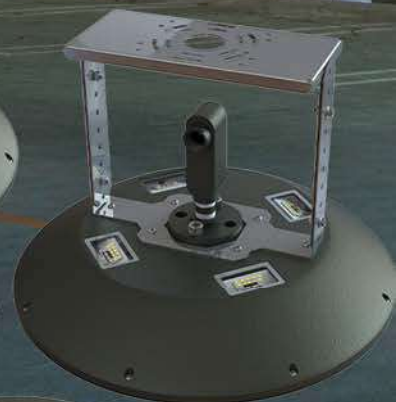

Ceiling Mount

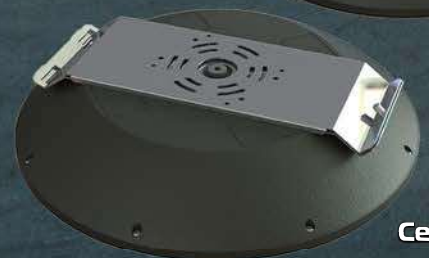

PRK LED Specifications



Project Name:

Catalog Number:

Type:

The PRK LED Series offers clean, functional styling that is defined by its sleek low profile design and rugged construction. It combines the latest LED edge-lit technology, advanced LED thermal management and provides canopy lighting that is both energy efficient and aesthetically pleasing.

The PRK housing is die-cast aluminum with internal heat sinks for maximum heat dissipation.

The PRK LED fixture offered with lumen packages between 3,000 - 15,000. Four different optical distribution patterns are available. Choose between 3K, 4K, or 5K Kelvin temperature of the LEDs.

A durable polyester powder coat finish is guaranteed for five years; and is available in standard or custom colors.

The PRK series is an exceptional choice for parking garage lighting and other ceiling mount application.

Ordering Information

MODEL	OPTICS	WATTAGE	KELVIN	VOLTAGE	MOUNTING	FINISH	OPTIONS	OPTIONS
PRK	T1 Type 1 25W-95W	25W	3K 3000K	UNV 120-277V	LPM Low Profile Mount Ceiling Mount No conduit feed.	BZ Bronze	UPL Up-light 800 lumens	DIM 0-10v Dimming Driver
	T3L Type 3 Long 25W-85W	35W	4K 4000K	5 480V	CM Ceiling Mount 1/2" & 3/4" Knockouts	BK Black	WG Wire Guard	EBPL 20W Emergency Battery Pack 120V-277V Only
	T5LR Type 5 Long Round 25W-115W	45W	5K 5000K	8 347V		WH White	WLG Wild Life Guard *Pendant Mount Only	CLD-EBPL 20W Cold Weather Emergency Battery Pack Rated for -20°C
	T5LS Type 5 Long Square 25W-65W	55W			TM Trunion Mount	SWH Smooth White	WSC-8 Dimmable Motion Sensor 8' Mounting Height	UL924 UL 942 Relay for Emergency Circuit
		65W				GP Graphite	WSC-20 Dimmable Motion Sensor 9-20' Mounting Height	10kV 10kV Surge Protector
		75W				GY Grey		20kV 20kV Surge Protector
		85W				SL Silver Metallic		VWC Visionaire Wireless Controls *Consult Factory
		95W				CC Custom Color	WSC-40 Dimmable Motion Sensor 21-40' Mounting Height *WSC options will require (1) FSIR 100 remote for programming	TPH Tamper Proof Hardware
		105W						
		115W						