



The **V Collection** powered by ARRAY from Visionaire Lighting can elegantly compliment the daytime architecture of your space while providing nighttime illumination that is up to the task and equally as elegant. The collection consists 4 sizes of site lighting fixture, 2 wall mounts and a bollard. Available with our ARRAY LED platform. Scale and design creativity has no limits for any application.


VMX-II Array



Key Features

- Die Cast aluminum housing
- IP65 Housing and LED optical assembly
- 1000 W Replacement
- Six New Versatile Mounts (UAM, SAM, AM, KM, MAF, AWM)
- Seven Comprehensive Shields (CLS, R-CLS, L-CLS, ADJLS, EGLS, HS, BD)
- Two Levels of Visual Comfort (LDL - Low Diffused and HDL - High Diffused)
- 10 Specification Grade low glare optics
- 25,000 – 55,000 lumen packages
- 172 - 400 wattage range
- 120-277 universal Drivers, 347 & 480 voltage drivers
- 10KV Surge Protector
- 90% Power Factor
- 10 Year Electrical Warranty
- PangeaLink compatible
- Quick Mount Cleat
- Mounts to round or square pole
- 3, 5 and 7 Photocell receptacles
- 0-10V Dimming driver
- Title 24 Compliant Motion Sensor

VMX-II Mounting Options

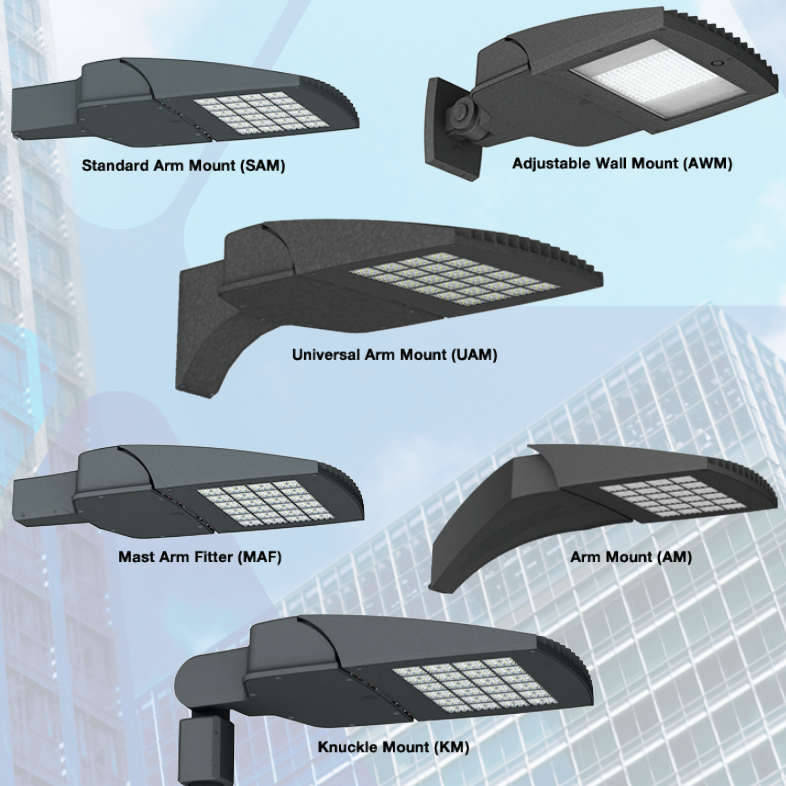

VMX-II Array LED Specifications



*Universal Arm Mount (UAM) Version Shown.

Project Name:

Catalog Number:

Type:

The **VMX-II Array LED** Series offers clean, functional styling that is defined by its sleek low profile design and rugged construction. It combines the latest LED Array technology, advanced LED thermal management and provides outdoor lighting that is both energy efficient and aesthetically pleasing.

The LED's performance and the driver's life are maximized by enclosing them in two separate cast aluminum housings.

The VMX-II Array LED fixture is offered with lumen packages ranging from 25,000 to 55,000. Ten optical distribution patterns are available. Choose between 3K, 4K or 5K Kelvin temperature of the LEDs.

A durable polyester powder coat finish is guaranteed for five years; and is available in standard or custom colors.

The **VMX-II Array LED** series is an exceptional choice for commercial parking lots, office complexes, architectural projects, and other general lighting projects.

Ordering Information

MODEL	OPTICS	LUMENS	KELVIN	VOLTAGE	MOUNTING	FINISH	OPTIONS	OPTIONS	OPTIONS
VMX-II	T1 Type 1	25L	3K 3000K	UNV 120-277V	AM Arm Mount	BZ Bronze	PCR-120	WSC-8 Motion Sensor 8' Mounting Height	UPMA-S Universal Square Pole Mount Adaptor
	T2 Type 2	30L	4K 4000K	8 347V	SAM Straight Arm Mount W/ Terminal Block (New Construction)	BK Black	PCR-208		
	T3 Type 3	35L	5K 5000K	5 480V		SBK Smooth Black	PCR-240	WSC-20 Motion Sensor 9-20' Mounting Height	UPMA-R Universal Round Pole Mount Adaptor
	T3L Type 3 Long	40L			UAM Universal ArmW/ Terminal Block Mount (Retrofit)	WH White	PCR-277		
	T4 Type 4	45L			MAF Mast Arm Fitter	SWH Smooth White	PCR-347	WSC-40 Motion Sensor 21-40' Mounting Height *The WSC option will require (1) FSIR 100 remote for programming	BAWP Cast Wall Plate
	T4L Type 4 Long	50L			KM Knuckle Mount	GP Graphite	PCR-480 Photocell & Receptacle		ROT-R Rotated Optics Right Side
	T4A Type 4 Automotive	55L			WM Wall Mount *Requires BAWP	GY Grey	PER		ROT-L Rotated Optics Left Side
	T5SR Type 5 Short Round				AWM Adjustable Wall Mount	SL Silver Metallic	5PINPER 3, 5, or 7 Pin Photo Receptacle w/shorting cap Requires Dimming Driver	UMAP Universal Mast arm fitter	CLS Backside cutoff shield *Available up to 45L only
	T5LR Type 5 Long Round				*Round Pole Plate Adaptors (RPP) are to be ordered separately.	CC Custom Color	7PINPER 3, 5, or 7 Pin Photo Receptacle w/shorting cap Requires Dimming Driver	ECLS Egg Crate Louder Shield	RCLS Rightside cutoff shield *Available up to 45L only
	T5LS Type Long Square				*BAWP to be ordered separately		DIM 0-10v Dimming Driver	ADJLS Adjustable Louder Light Shield	LCLS Leftside cutoff shield *Available up to 45L only
							RPP Round Pole Plate Adaptor	BD Barn Door Shield	HS House shield
							VWC Visionaire Wireless Controls *Consult Factory		