


INSTALLATION OF ARIA ARM MOUNT


All installation work must be performed by a qualified, certified electrician.

Caution! Disconnect all power before installation.


1. Open the access clips in the bottom part of the lamp and gently swing the doorway downward.

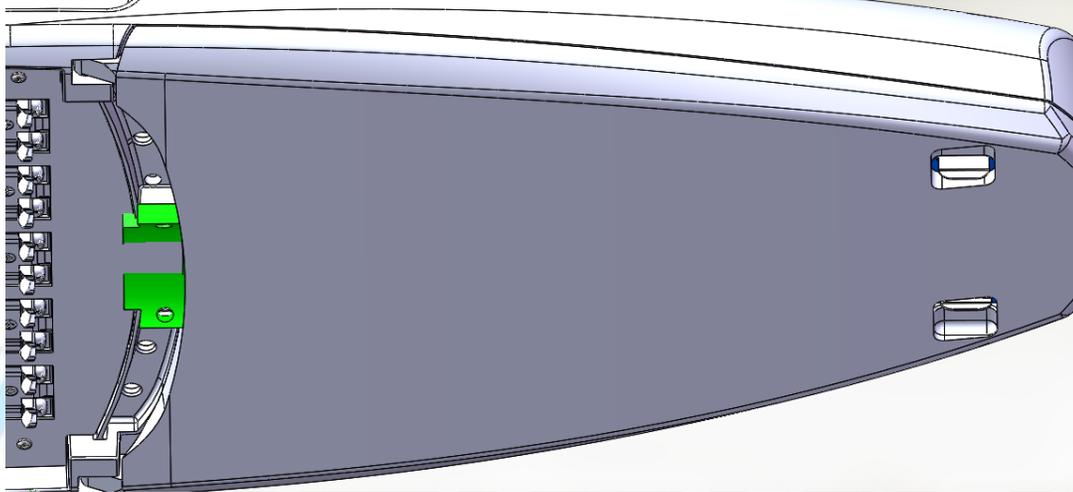


1. Loosen the four 1/2"-13 hex head bolts holding the two clamp brackets enough to slide lamp into arm approx 4.5" (125mm) deep, until arm rest on steps that would sit between the mast arm and pipe clamps and run electrical feed wires to inside of lamp terminal block.

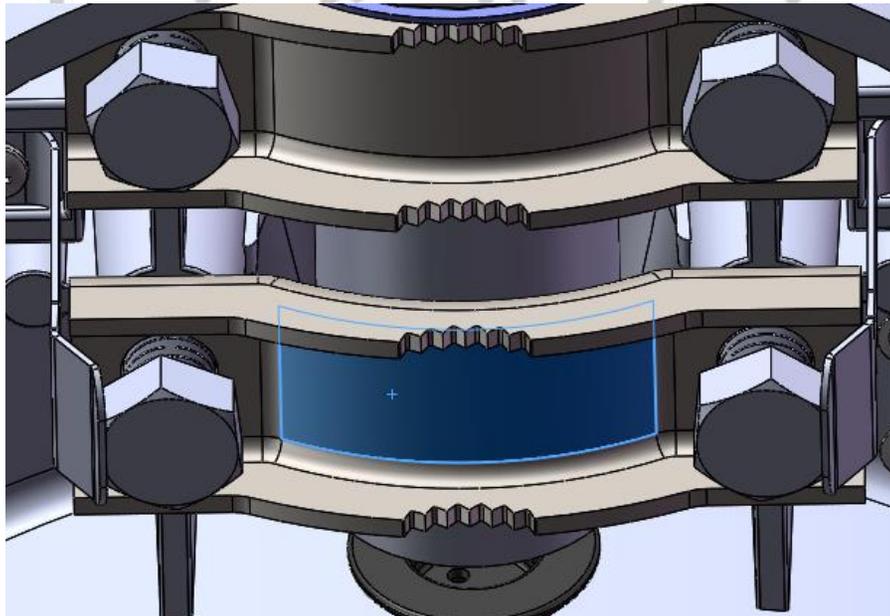

- Using the different step heights, adjust the lamp and using the bubble level, confirm that the lamp is properly leveled.

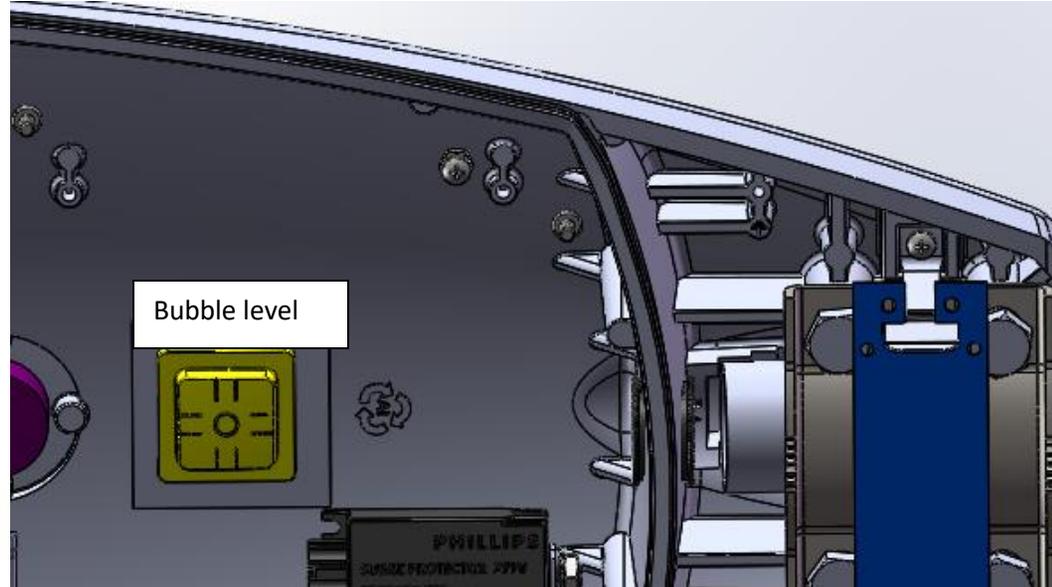

- Tighten both sets of pipe clamp bolts to fully secure the lamp to the pole, recommended torque 180 to 240 in-lbf (15 to 20 ft-lbf/20 to 27 N-m) .

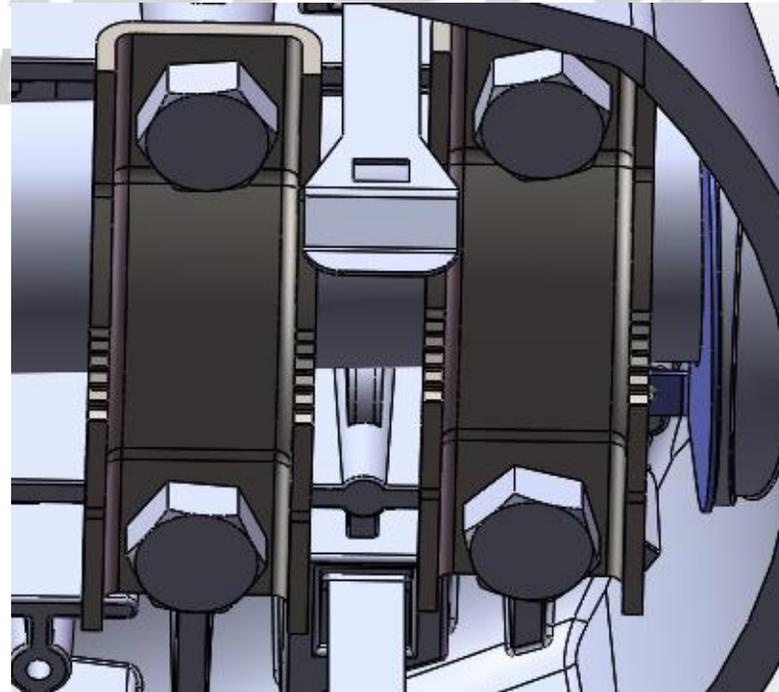

4. Put service door and components in the correct place y close the door.

